

# OFFICE OF THE MARION COUNTY SURVEYOR

## SECTION RECORD CORNER

SECTION 11 TOWNSHIP 15 RANGE 2

DATE: 9-21-03

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-13-97

IN. S.P.C. E ZONE NAD '83

NAME: 15021102

N: 501545.0530(m)

E: 47491.7199(m)

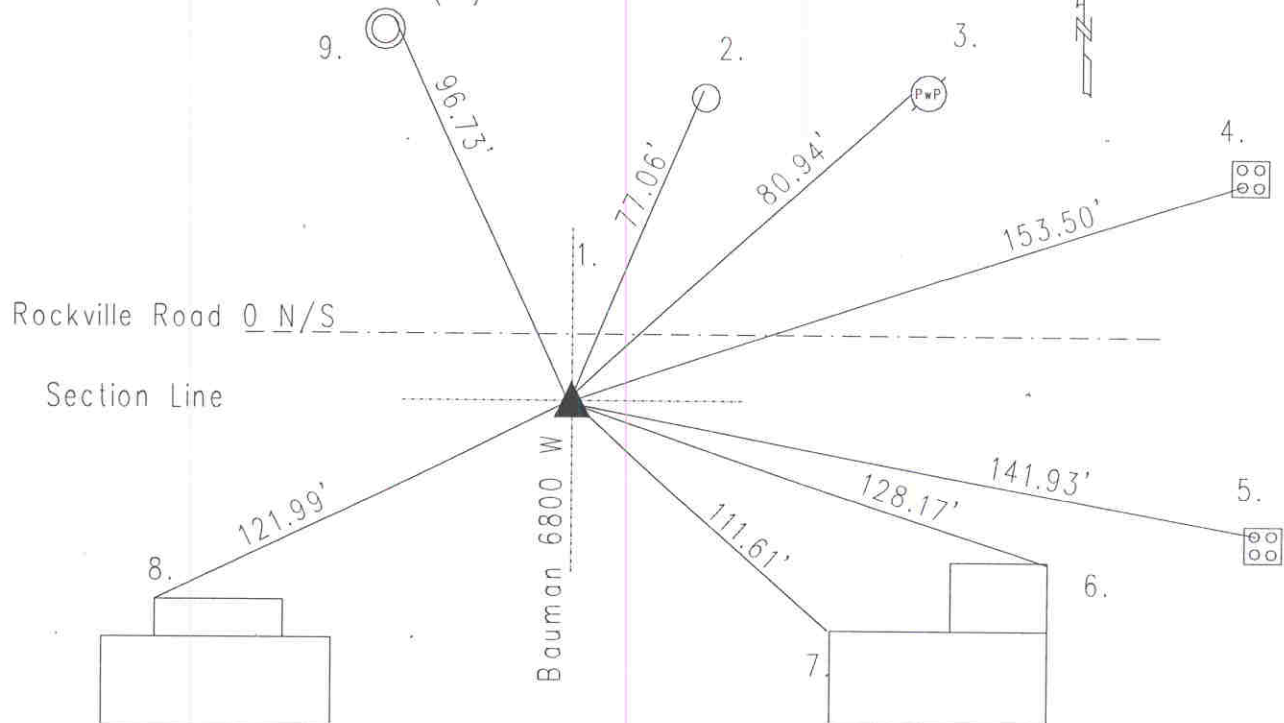

Original post set 1820 by Laughlin with witnesses: 12" hickory S 80. W 32 links; 36" white oak N 64 E 14 links per Marion County Atlas pg. 2. Hosbrook 3-4-1854 called no stone but witness: 10" black oak N 31 1/2 W 57 1/3 links per Wayne Township Legal Survey Book pg. 27. Rooker 7-15-46 called railroad spike Miller 4-15-75 called brass plug. Miller 11-3-76 called same. Cleveland 9-11-84 called same. Wilcoxon 11-25-95 called same. Excavated by Wilcoxon 6-3-97 Harrison set. Re-tied 7-13-97. Re-tied 9-21-03 by Wilcoxon.

REF.	DISTANCE	DESCRIPTION
1.	17.32'	Due N to C/L of road
2.	77.06'	Top nut of fire hydrant
3.	80.94'	PK nail W PwP#3-523A 36" up
4.	153.50'	Cut 'x' SW bolt of aluminum pole base
5.	141.93'	Cut 'x' NW bolt of aluminum pole base
6.	128.17'	NE corner of "Acupuncture Business"
7.	111.61'	NW corner "
8.	121.99'	NW corner of bottom step
9.	96.73'	Cut 'x' top E light pole concrete base